

Big data: architectures and data analytics


The BigData@Polito environment

The BigData@Polito environment

- The BigData@Polito cluster has
 - A set of 30 servers running Hadoop
 - An **Access Gateway** server used to interact with the Hadoop cluster
 - Submit jobs/execute MapReduce applications
 - Submit hdfs commands
 - Analyze the log files from command line
 - The access gateway node is bigdatalab.polito.it

3

The BigData@Polito environment

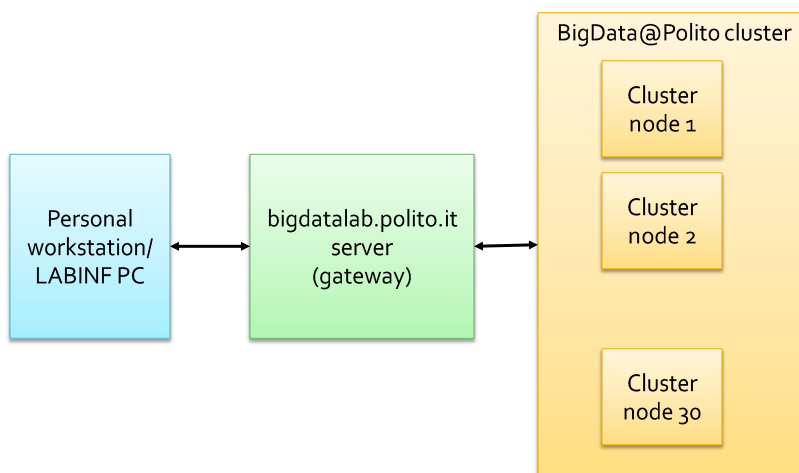

4

The BigData@Polito environment – Execute an application (1)

- Execute a MapReduce Application (i.e., submit a job)
 - Copy the jar file containing your application from your personal workstation (or the workstation of LABINF) in the local file system of bigdatalab.polito.it
 - Use scp or an ftp application (e.g., FileZilla)
 - Copy the input data of your application from the local drive of your personal workstation in the HDFS file system of the cluster
 - Use HUE web interface
 - <https://bigdatalab.polito.it:8080>

5

The BigData@Polito environment – Execute an application (2)

- Connect to the bigdatalab.polito.it server by using the ssh command
- Use the hadoop command from the shell of bigdatalab.polito.it to submit the job
 - Specify the name of the jar file, the name of the input (HDFS) data, the name of output folder, the parameters/arguments of the application

6