

Association Rules Fundamentals



Data Base and Data Mining Group of Politecnico di Torino

Elena Baralis, Silvia Chiusano
Politecnico di Torino



Association rules

- Objective
 - extraction of frequent correlations or pattern from a transactional database

Tickets at a supermarket counter

TID	Items
1	Bread, Coke, Milk
2	Beer, Bread
3	Beer, Coke, Diapers, Milk
4	Beer, Bread, Diapers, Milk
5	Coke, Diapers, Milk
...	...

- Association rule
 - diapers \Rightarrow beer
 - 2% of transactions contains both items
 - 30% of transactions containing diapers also contains beer



2



Association rule mining

- A collection of transactions is given
 - a transaction is a set of items
 - items in a transaction are not ordered
- Association rule

$$A, B \Rightarrow C$$
 - A, B = items in the *rule body*
 - C = item in the *rule head*
- The \Rightarrow means co-occurrence
 - not causality
- Examples
 - cereals, cookies \Rightarrow milk
 - age < 40, life-insurance = yes \Rightarrow children = yes
 - customer, relationship \Rightarrow data, mining

DB
M

3



Definitions

- *Itemset* is a set including one or more items
 - Example: {Beer, Diapers}
- *k-itemset* is an itemset that contains k items
- *Support count*(#) is the frequency of occurrence of an itemset
 - Example: #{{Beer,Diapers}} = 2
- *Support* is the fraction of transactions that contain an itemset
 - Example: sup({Beer, Diapers}) = 2/5
- *Frequent itemset* is an itemset whose support is greater than or equal to a *minsup* threshold

TID	Items
1	Bread, Coke, Milk
2	Beer, Bread
3	Beer, Coke, Diapers, Milk
4	Beer, Bread, Diapers, Milk
5	Coke, Diapers, Milk

DB
M

4



Rule quality metrics

- Given the association rule
 $A \Rightarrow B$
 - A, B are itemsets
- **Support** is the fraction of transactions containing both A and B

$$\frac{\#(A,B)}{|T|}$$
 - $|T|$ is the cardinality of the transactional database
 - a priori probability of itemset AB
 - rule frequency in the database
- **Confidence** is the frequency of B in transactions containing A

$$\frac{\text{sup}(A,B)}{\text{sup}(A)}$$
 - conditional probability of finding B having found A
 - "strength" of the " \Rightarrow "

DB
M

5



Rule quality metrics: example

- From itemset {Milk, Diapers} the following rules may be derived
- Rule: Milk \Rightarrow Diapers
 - support
 $\text{sup} = \#\{\text{Milk, Diapers}\} / \#\text{trans.} = 3/5 = 60\%$
 - confidence
 $\text{conf} = \#\{\text{Milk, Diapers}\} / \#\{\text{Milk}\} = 3/4 = 75\%$
- Rule: Diapers \Rightarrow Milk
 - same support
 $s=60\%$
 - confidence
 $\text{conf} = \#\{\text{Milk, Diapers}\} / \#\{\text{Diapers}\} = 3/3 = 100\%$

TID	Items
1	Bread, Coke, Milk
2	Beer, Bread
3	Beer, Coke, Diapers, Milk
4	Beer, Bread, Diapers, Milk
5	Coke, Diapers, Milk

DB
M

6



Association rule extraction

- Given a set of transactions T , association rule mining is the extraction of the rules satisfying the constraints
 - support $\geq \text{minsup}$ threshold
 - confidence $\geq \text{minconf}$ threshold
- The result is
 - complete (*all* rules satisfying both constraints)
 - correct (*only* the rules satisfying both constraints)
- May add other more complex constraints

DB
M

7



Association rule extraction

- Brute-force approach
 - enumerate all possible permutations (i.e., association rules)
 - compute support and confidence for each rule
 - prune the rules that do not satisfy the minsup and minconf constraints
- Computationally *unfeasible*
- Given an itemset, the extraction process may be split
 - first generate frequent itemsets
 - next generate rules from each frequent itemset
- Example
 - Itemset
 - {Milk, Diapers} sup=60%
 - Rules
 - Milk \Rightarrow Diapers (conf=75%)
 - Diapers \Rightarrow Milk (conf=100%)

DB
M

8



Association rule extraction

(1) Extraction of frequent itemsets

- many different techniques
 - level-wise approaches (Apriori, ...)
 - approaches without candidate generation (FP-growth, ...)
 - other approaches
- most computationally expensive step
 - limit extraction time by means of support threshold

(2) Extraction of association rules

- generation of all possible binary partitioning of each frequent itemset
 - possibly enforcing a confidence threshold


DB
M

9



Frequent Itemset Generation

Given d items, there
are 2^d possible
candidate itemsets

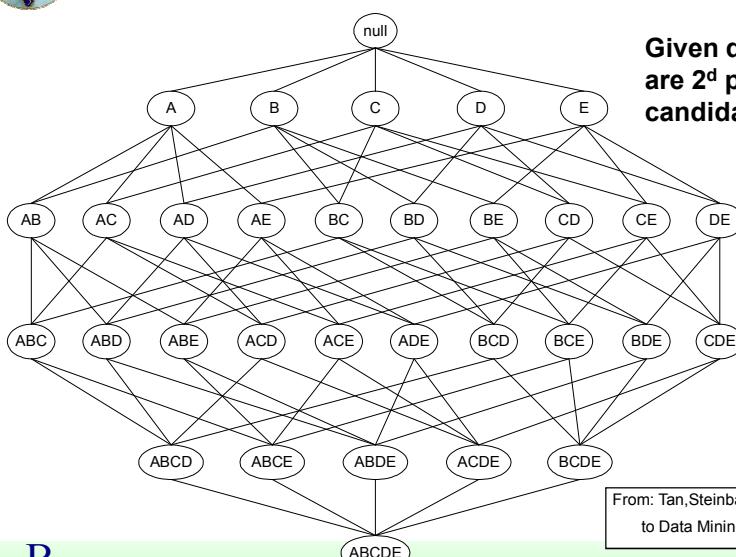

From: Tan, Steinbach, Kumar, Introduction
to Data Mining, McGraw Hill 2006

DB
M

10



Frequent Itemset Generation

- Brute-force approach
 - each itemset in the lattice is a *candidate* frequent itemset
 - scan the database to count the support of each candidate
 - match each transaction against every candidate
 - Complexity $\sim O(|T| 2^d w)$
 - $|T|$ is number of transactions
 - d is number of items
 - w is transaction length

DB
MG

11



Improving Efficiency

- Reduce the **number of candidates**
 - Prune the search space
 - complete set of candidates is 2^d
- Reduce the **number of transactions**
 - Prune transactions as the size of itemsets increases
 - reduce $|T|$
- Reduce the **number of comparisons**
 - Equal to $|T| 2^d$
 - Use efficient data structures to store the candidates or transactions

DB
MG

12



The Apriori Principle

"If an itemset is frequent, then all of its subsets must also be frequent"

- The support of an itemset can never exceed the support of any of its subsets
- It holds due to the antimonotone property of the support measure
 - Given two arbitrary itemsets A and B
 $\text{if } A \subseteq B \text{ then } \text{sup}(A) \geq \text{sup}(B)$
- It reduces the number of candidates

DB
M

13

The Apriori Principle

From: Tan, Steinbach, Kumar, Introduction to Data Mining, McGraw Hill 2006

Found to be Infrequent

Pruned supersets

DB
M

14



Apriori Algorithm [Agr94]

- Level-based approach
 - at each iteration extracts itemsets of a given length k
- Two main steps for each level
 - (1) Candidate generation
 - Join Step
 - generate candidates of length k+1 by joining frequent itemsets of length k
 - Prune Step
 - apply Apriori principle: prune length k+1 candidate itemsets that contain at least one k-itemset that is not frequent
 - (2) Frequent itemset generation
 - scan DB to count support for k+1 candidates
 - prune candidates below minsup

DB
M

15



Apriori Algorithm [Agr94]

- Pseudo-code

C_k : Candidate itemset of size k
 L_k : frequent itemset of size k

```

 $L_1 = \{\text{frequent items}\};$ 
for ( $k = 1; L_k \neq \emptyset; k++$ ) do
    begin
         $C_{k+1} = \text{candidates generated from } L_k;$ 
        for each transaction  $t$  in database do
            increment the count of all candidates in  $C_{k+1}$ 
            that are contained in  $t$ 
         $L_{k+1} = \text{candidates in } C_{k+1} \text{ satisfying } \text{minsup}$ 
    end
return  $\cup_k L_k;$ 
```

DB
M

16



Generating Candidates

- Sort L_k candidates in lexicographical order
- For each candidate of length k
 - Self-join with each candidate sharing same L_{k-1} prefix
 - Prune candidates by applying Apriori principle
- Example: given $L_3 = \{abc, abd, acd, ace, bcd\}$
 - Self-join
 - abcd from abc and abd
 - acde from acd and ace
 - Prune by applying Apriori principle
 - acde is removed because ade is not in L_3
 - $C_4 = \{abcd\}$

DB
M

17



Apriori Algorithm: Example

Example DB

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}

minsup>1

DB
M

18



Generate candidate 1-itemsets

Example DB

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}

$\text{minsup} > 1$

1st DB
scan

C_1	
itemsets	sup
{A}	7
{B}	8
{C}	7
{D}	5
{E}	3

DB
MG

19

Prune infrequent candidates in C_1

Example DB

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}

$\text{minsup} > 1$

1st DB
scan

C_1	
itemsets	sup
{A}	7
{B}	8
{C}	7
{D}	5
{E}	3

$L_1 \equiv C_1$

- All itemsets in set C_1 are frequent according to $\text{minsup} > 1$

DB
MG

20

Generate candidates from L_1

L_1	
itemsets	sup
{A}	7
{B}	8
{C}	7
{D}	5
{E}	3

C_2	
itemsets	
{A,B}	
{A,C}	
{A,D}	
{A,E}	
{B,C}	
{B,D}	
{B,E}	
{C,D}	
{C,E}	
{D,E}	

DBMG

21

Count support for candidates in C_2

L_1	
itemsets	sup
{A}	7
{B}	8
{C}	7
{D}	5
{E}	3


C_2	
itemsets	sup
{A,B}	
{A,C}	
{A,D}	
{A,E}	
{B,C}	
{B,D}	
{B,E}	
{C,D}	
{C,E}	
{D,E}	

2nd DB scan


C_2	
itemsets	sup
{A,B}	5
{A,C}	4
{A,D}	4
{A,E}	2
{B,C}	6
{B,D}	3
{B,E}	1
{C,D}	3
{C,E}	2
{D,E}	2

DBMG

22

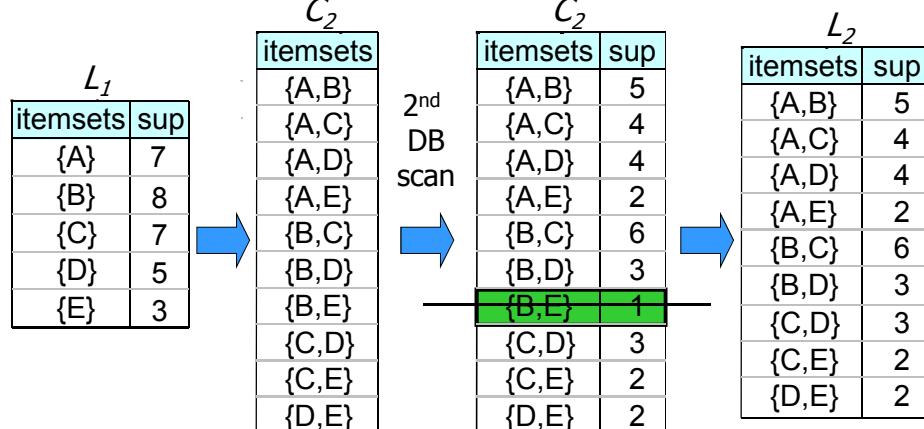Prune infrequent candidates in C_2 D_M^BG

23

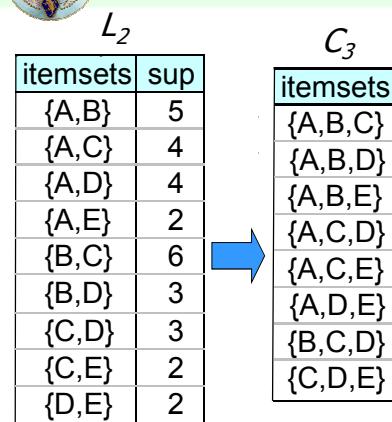Generate candidates from L_2 D_M^BG

24

 **Apply Apriori principle on C_3**

itemsets	sup
{A,B}	5
{A,C}	4
{A,D}	4
{A,E}	2
{B,C}	6
{B,D}	3
{C,D}	3
{C,E}	2
{D,E}	2

$\xrightarrow{\hspace{1cm}}$

itemsets
{A,B,C}
{A,B,D}
{A,B,E}
{A,C,D}
{A,C,E}
{A,D,E}
{B,C,D}
{C,D,E}

- Prune {A,B,E}
 - Its subset {B,E} is infrequent ($\{B,E\}$ is not in L_2)

D^B_M 25

 **Count support for candidates in C_3**

itemsets	sup
{A,B}	5
{A,C}	4
{A,D}	4
{A,E}	2
{B,C}	6
{B,D}	3
{C,D}	3
{C,E}	2
{D,E}	2



$\xrightarrow{\hspace{1cm}}$

itemsets
{A,B,C}
{A,B,D}
{A,B,E}
{A,C,D}
{A,C,E}
{A,D,E}
{B,C,D}
{C,D,E}

3rd DB scan $\xrightarrow{\hspace{1cm}}$

itemsets	sup
{A,B,C}	3
{A,B,D}	2
{A,C,D}	2
{A,C,E}	1
{A,D,E}	2
{B,C,D}	2
{C,D,E}	1

D^B_M 26

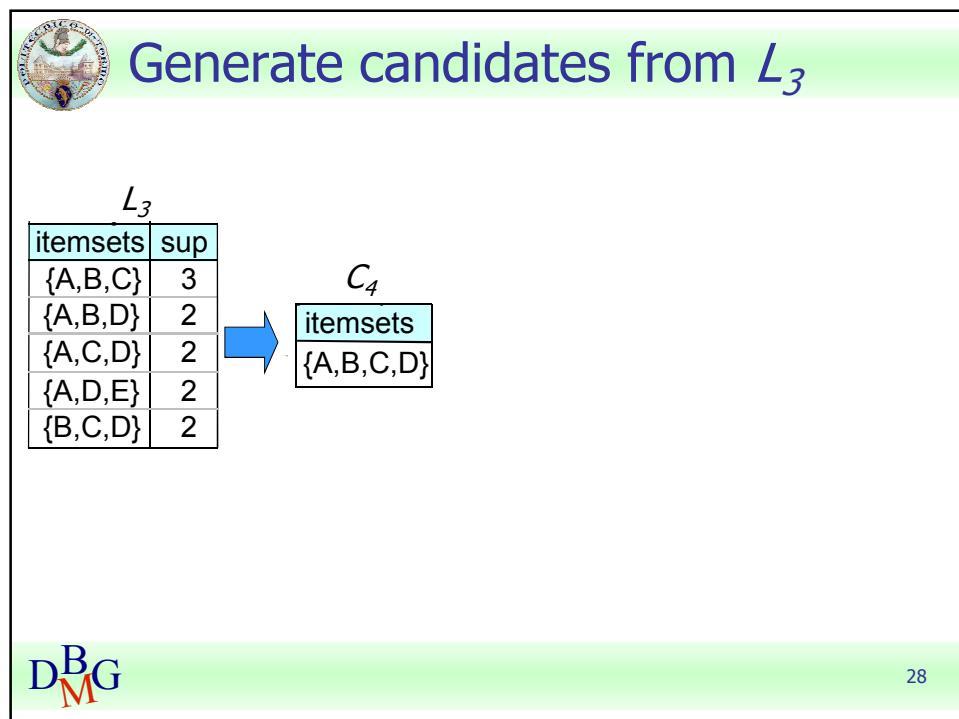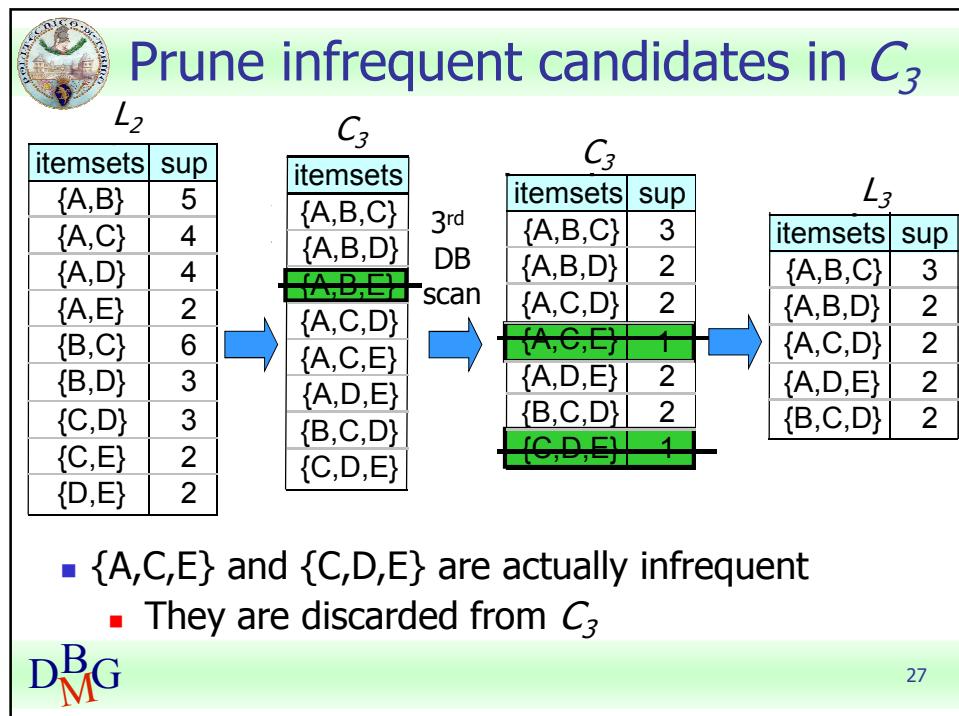



Apply Apriori principle on C_4

L_3	
itemsets	sup
{A,B,C}	3
{A,B,D}	2
{A,C,D}	2
{A,D,E}	2
{B,C,D}	2

→

C_4	
itemsets	
{A,B,C,D}	

- Check if {A,C,D} and {B,C,D} belong to L_3
 - L_3 contains all 3-itemset subsets of {A,B,C,D}
 - {A,B,C,D} is potentially frequent

DB
MG

29



Count support for candidates in C_4

L_3	
itemsets	sup
{A,B,C}	3
{A,B,D}	2
{A,C,D}	2
{A,D,E}	2
{B,C,D}	2

→

C_4	
itemsets	
{A,B,C,D}	

4th DB
scan

→


C_4	
itemsets	sup
{A,B,C,D}	1

DB
MG

30



Prune infrequent candidates in C_4

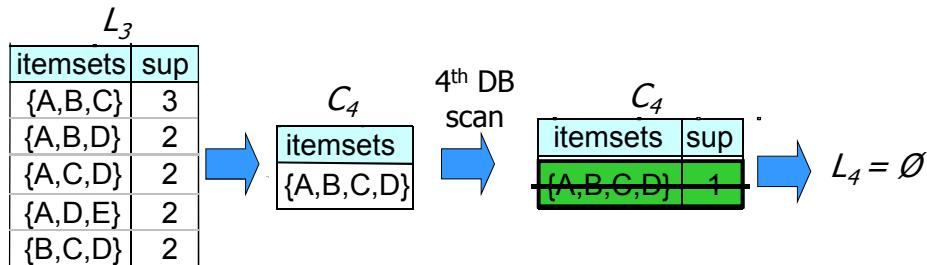

- {A,B,C,D} is actually infrequent
 - {A,B,C,D} is discarded from C_4

DBMG

31



Final set of frequent itemsets

Example DB

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}

minsup>1

 L_1

itemsets	sup
{A}	7
{B}	8
{C}	7
{D}	5
{E}	3

 L_3

itemsets	sup
{A,B,C}	3
{A,B,D}	2
{A,C,D}	2
{A,D,E}	2
{B,C,D}	2

 L_2

itemsets	sup
{A,B}	5
{A,C}	4
{A,D}	4
{A,E}	2
{B,C}	6
{B,D}	3
{C,D}	3
{C,E}	2
{D,E}	2

DBMG

32



Counting Support of Candidates

- Scan transaction database to count support of each itemset
 - total number of candidates may be large
 - one transaction may contain many candidates
- Approach [Agr94]
 - candidate itemsets are stored in a *hash-tree*
 - *leaf* node of hash-tree contains a list of itemsets and counts
 - *interior* node contains a hash table
 - subset function finds all candidates contained in a transaction
 - match transaction subsets to candidates in hash tree

DB
MG

33



Performance Issues in Apriori

- Candidate generation
 - Candidate sets may be huge
 - 2-itemset candidate generation is the most critical step
 - extracting long frequent itemsets requires generating all frequent subsets
- Multiple database scans
 - $n + 1$ scans when longest frequent pattern length is n

DB
MG

34



Factors Affecting Performance

- Minimum support threshold
 - lower support threshold increases number of frequent itemsets
 - larger number of candidates
 - larger (max) length of frequent itemsets
- Dimensionality (number of items) of the data set
 - more space is needed to store support count of each item
 - if number of frequent items also increases, both computation and I/O costs may also increase
- Size of database
 - since Apriori makes multiple passes, run time of algorithm may increase with number of transactions
- Average transaction width
 - transaction width increases in dense data sets
 - may increase max length of frequent itemsets and traversals of hash tree
 - number of subsets in a transaction increases with its width

DB
MG

35



Improving Apriori Efficiency

- Hash-based itemset counting [Yu95]
 - A k -itemset whose corresponding hashing bucket count is below the threshold cannot be frequent
- Transaction reduction [Yu95]
 - A transaction that does not contain any frequent k -itemset is useless in subsequent scans
- Partitioning [Sav96]
 - Any itemset that is potentially frequent in DB must be frequent in at least one of the partitions of DB

DB
MG

36



Improving Apriori Efficiency

- Sampling [Toi96]
 - mining on a subset of given data, lower support threshold + a method to determine the completeness
- Dynamic Itemset Counting [Motw98]
 - add new candidate itemsets only when all of their subsets are estimated to be frequent

DB
M

37



FP-growth Algorithm [Han00]

- Exploits a main memory compressed representation of the database, the FP-tree
 - high compression for dense data distributions
 - less so for sparse data distributions
 - complete representation for frequent pattern mining
 - enforces support constraint
- Frequent pattern mining by means of FP-growth
 - recursive visit of FP-tree
 - applies divide-and-conquer approach
 - decomposes mining task into smaller subtasks
- Only two database scans
 - count item supports + build FP-tree

DB
M

38



FP-tree construction

Example DB

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}

minsup>1

- (1) Count item support and prune items below minsup threshold
- (2) Build Header Table by sorting items in decreasing support order

Header Table

Item	sup
{B}	8
{A}	7
{C}	7
{D}	5
{E}	3

DB
MG

39



FP-tree construction

Example DB



TID	Items
1	{A,B}
2	{B,C,D}
3	{A,C,D,E}
4	{A,D,E}
5	{A,B,C}
6	{A,B,C,D}
7	{B,C}
8	{A,B,C}
9	{A,B,D}
10	{B,C,E}



minsup>1



- (1) Count item support and prune items below minsup threshold
- (2) Build Header Table by sorting items in decreasing support order
- (3) Create FP-tree
 - For each transaction t in DB
 - order transaction t items in decreasing support order
 - same order as Header Table
 - insert transaction t in FP-tree
 - use existing path for common prefix
 - create new branch when path becomes different



DB
MG



40

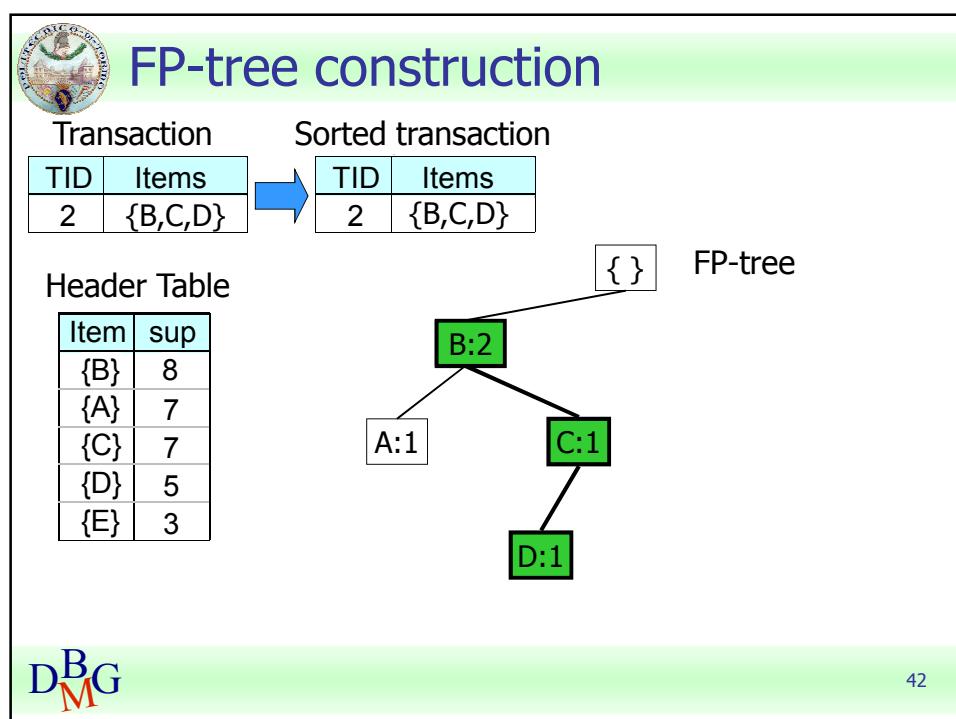
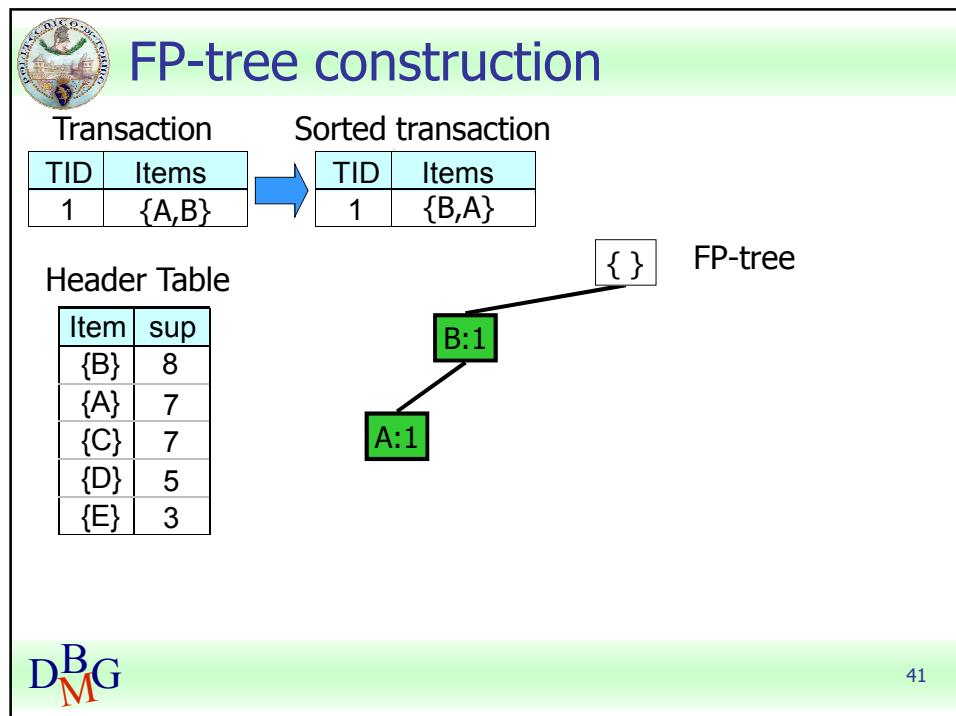


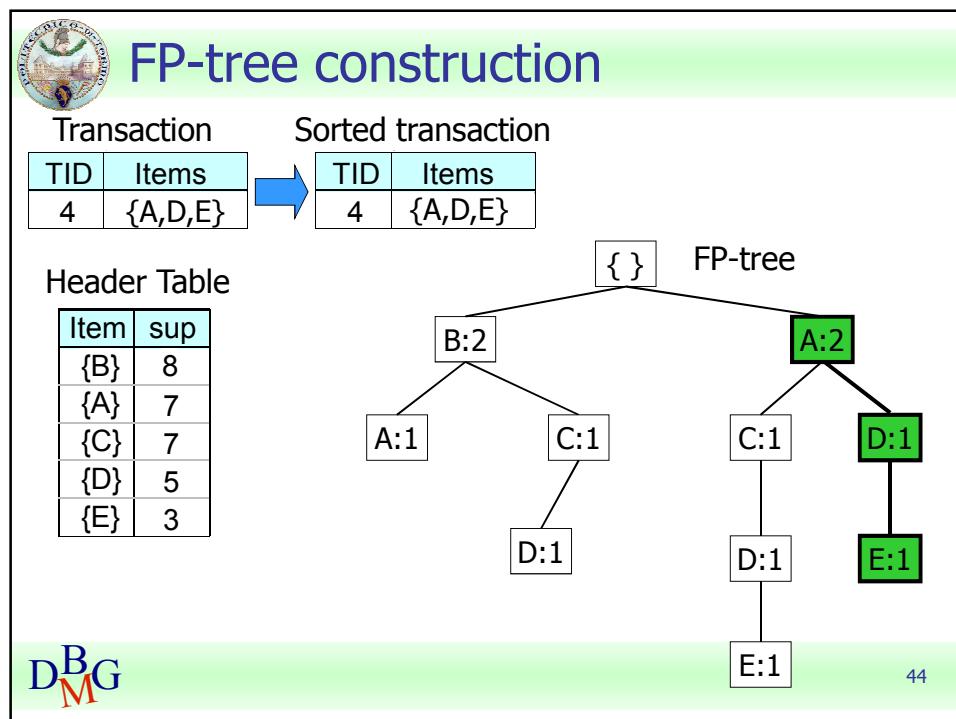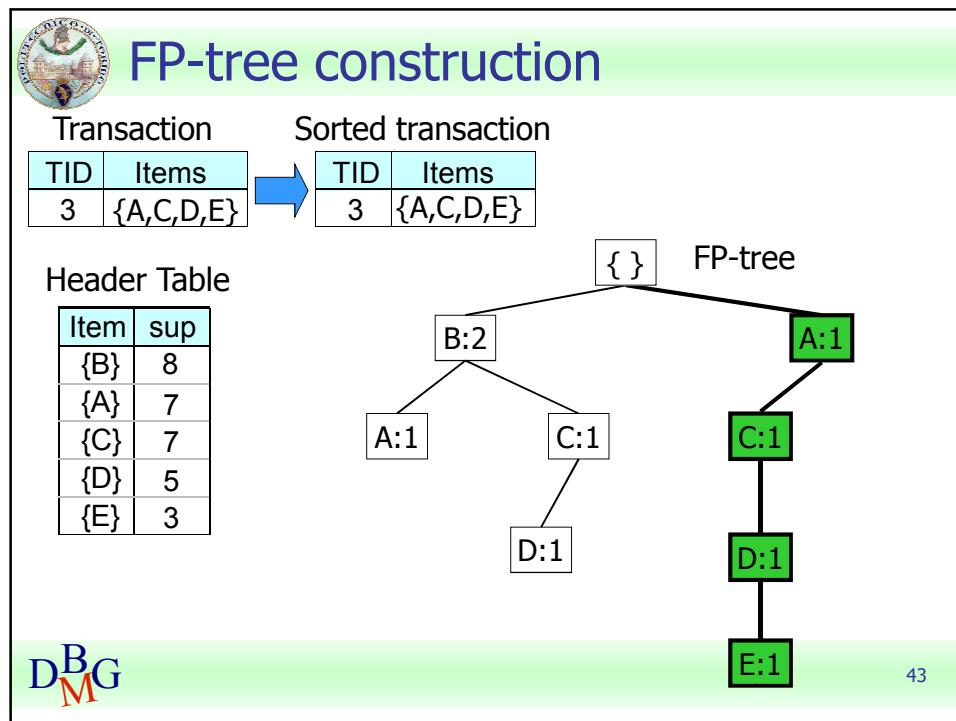

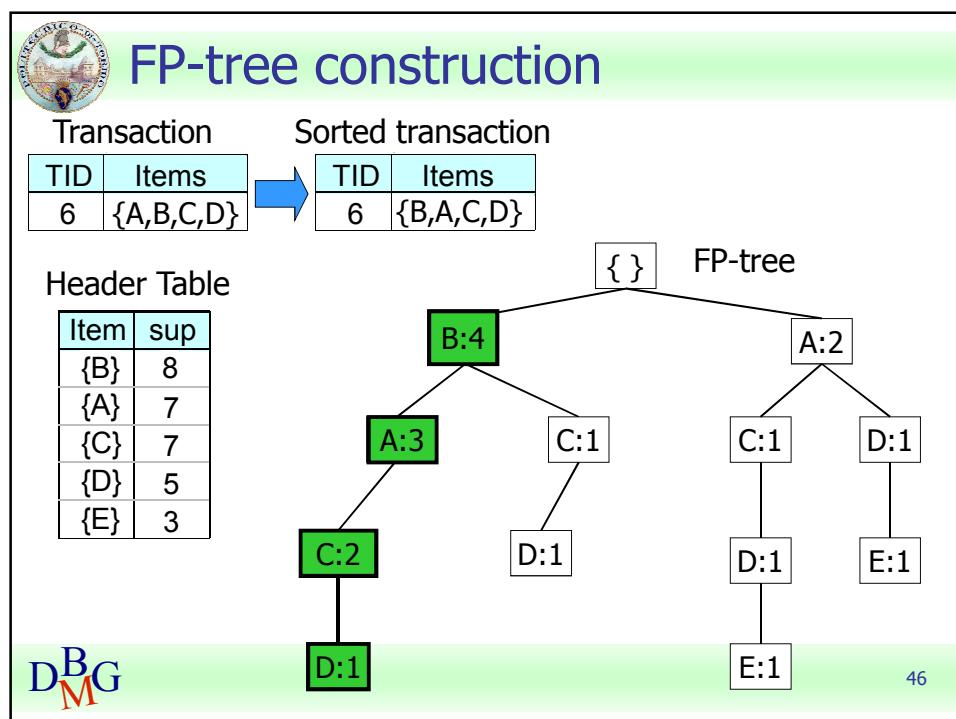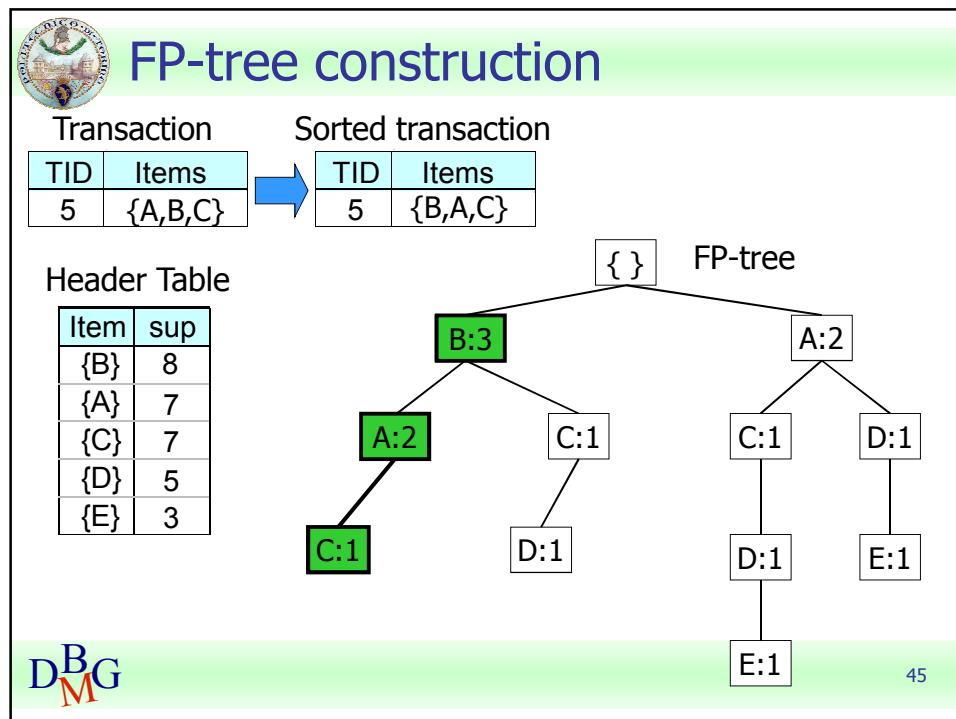

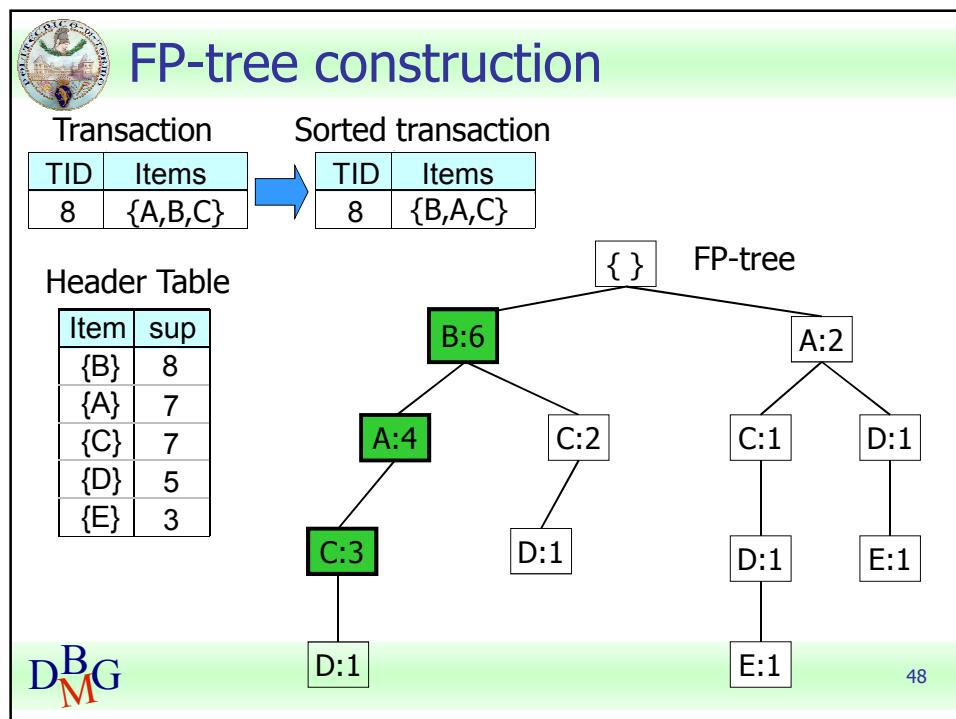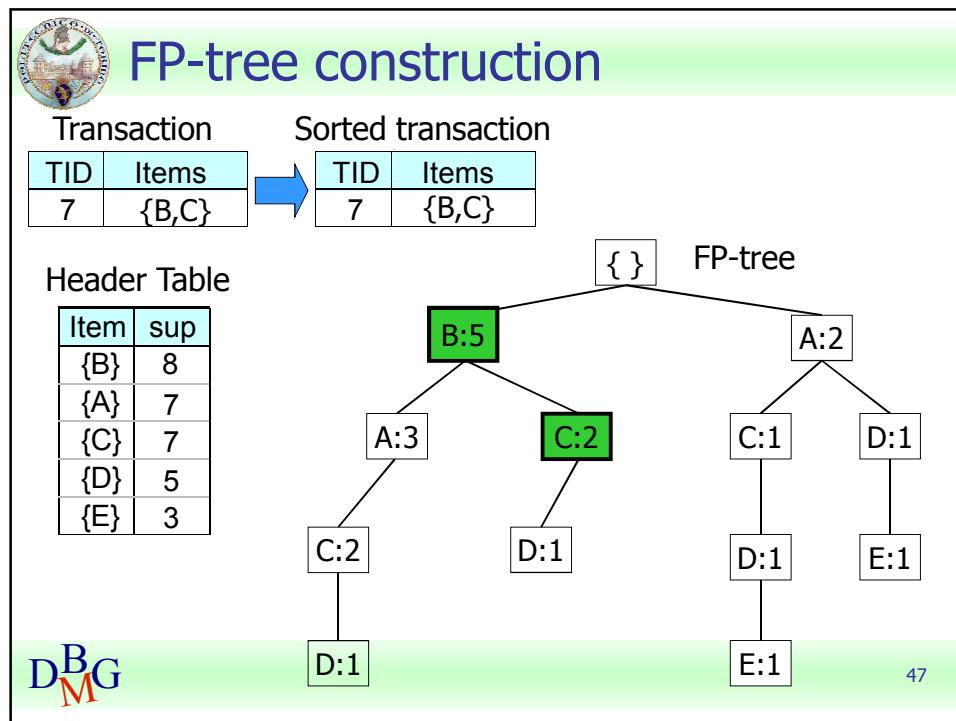

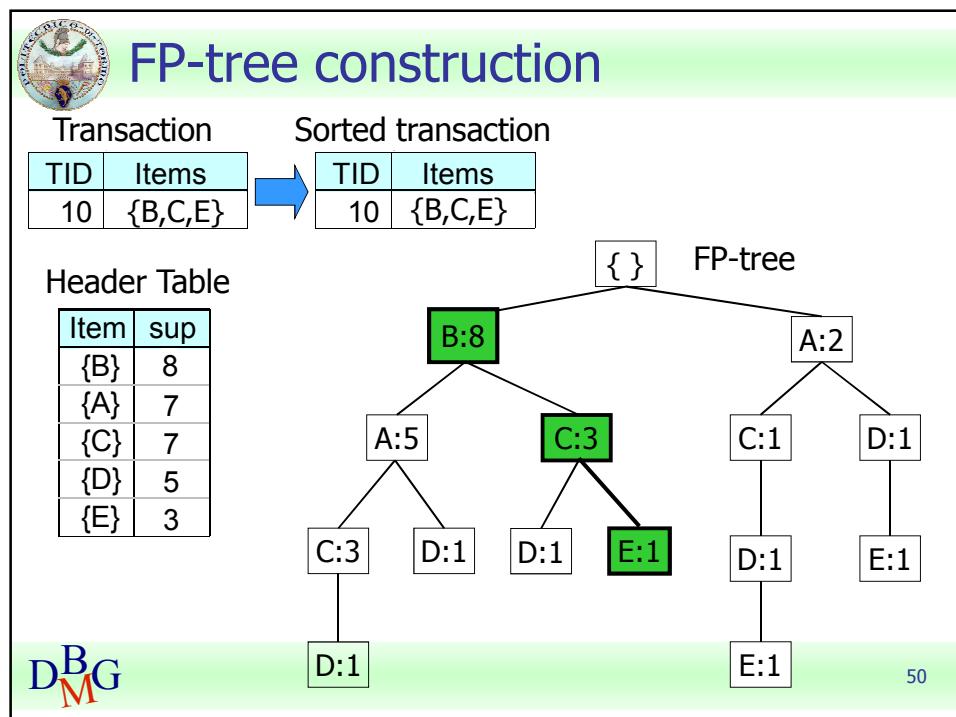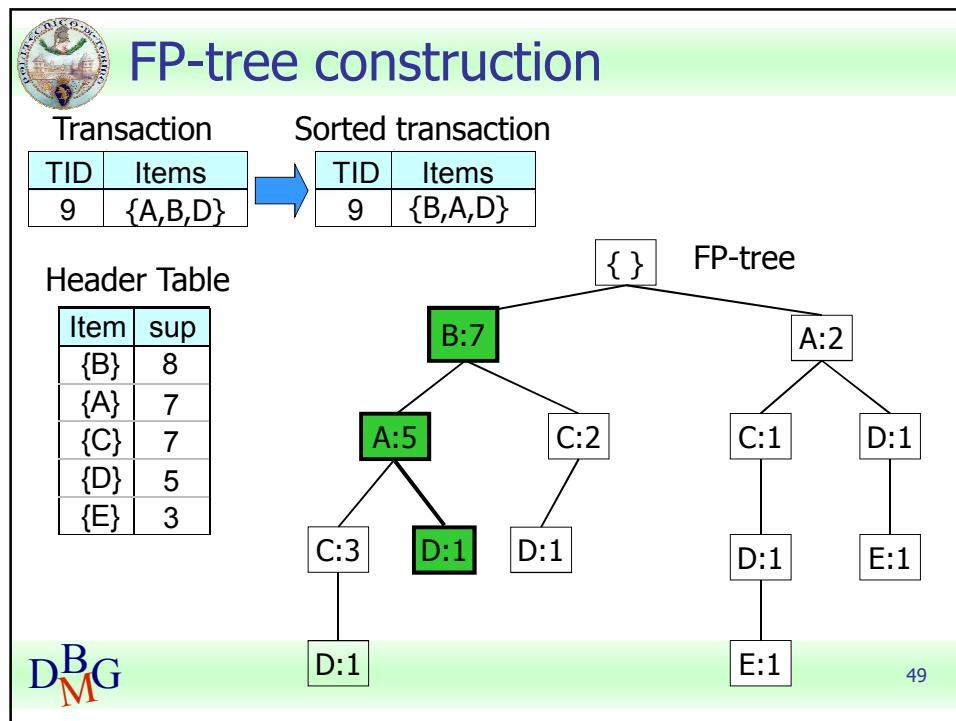

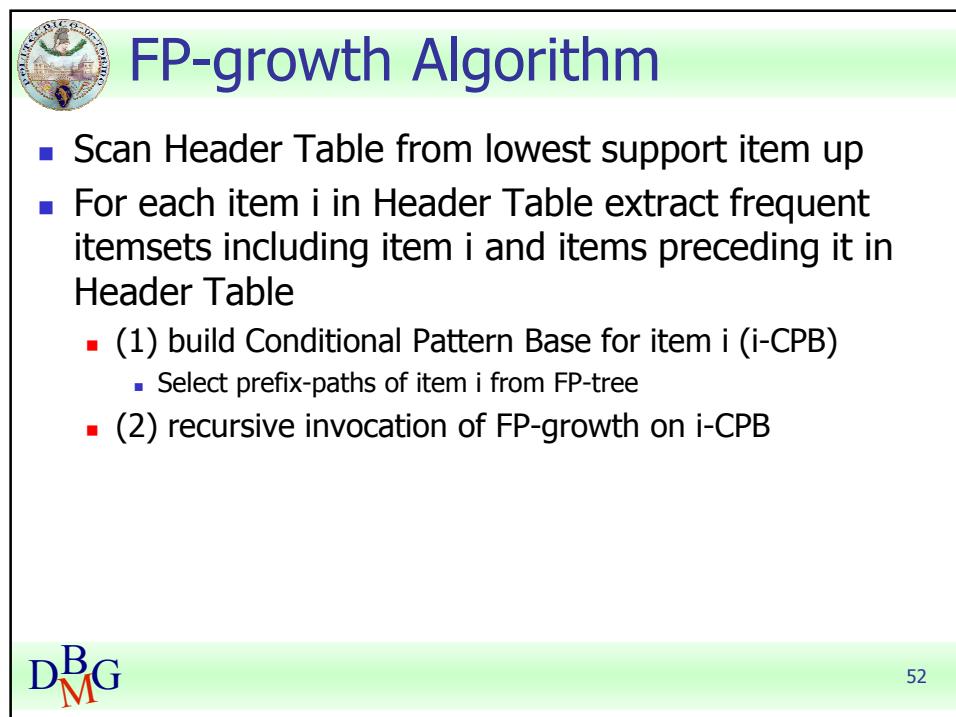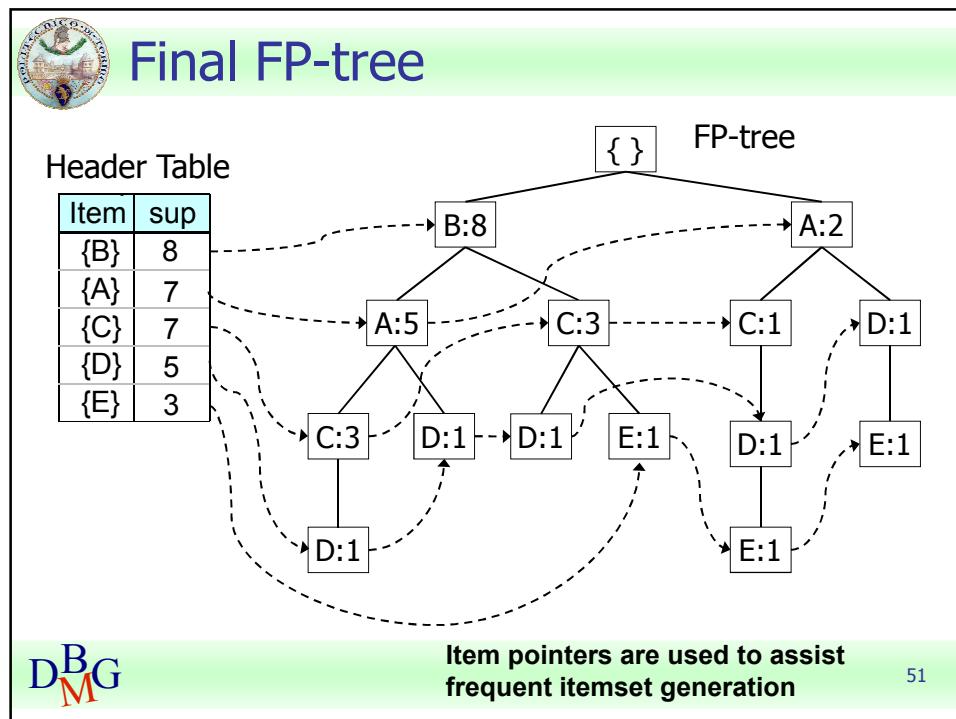

Example

- Consider item D and extract frequent itemsets including
 - D and supported combinations of items A, B, C

Header Table

Item	sup
{B}	8
{A}	7
{C}	7
{D}	5
{E}	3

FP-tree

53

D^B_{MG}

Conditional Pattern Base of D

- (1) Build D-CPB
 - Select prefix-paths of item D from FP-tree

Header Table



Item	sup
{B}	8
{A}	7
{C}	7
{D}	5
{E}	3



Frequent itemset:
 D , $\text{sup}(D) = 5$


FP-tree

54


D^B_{MG}

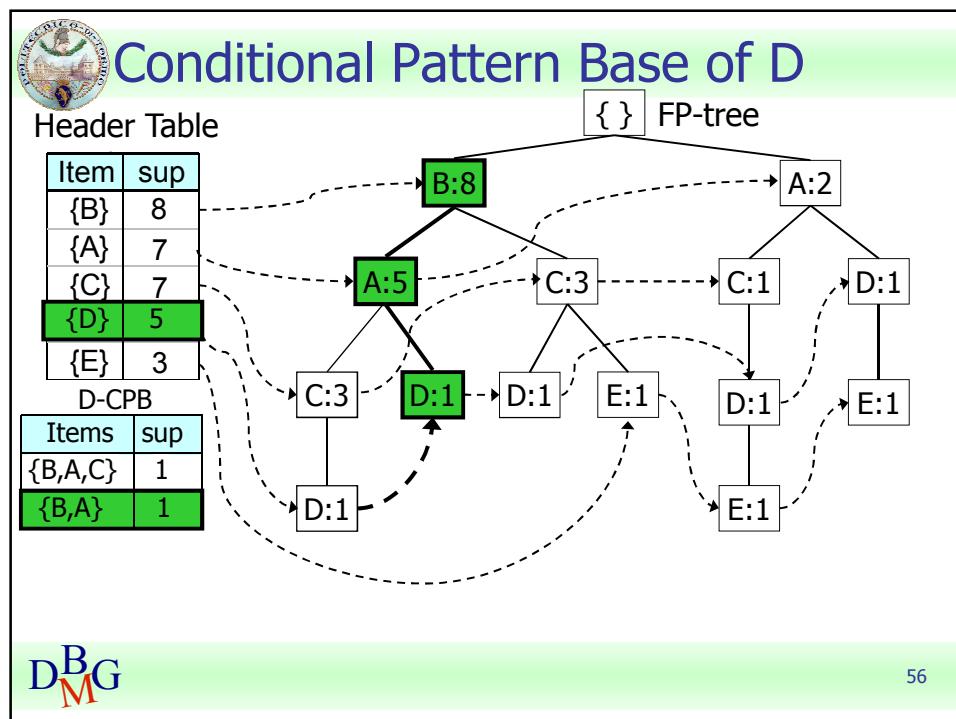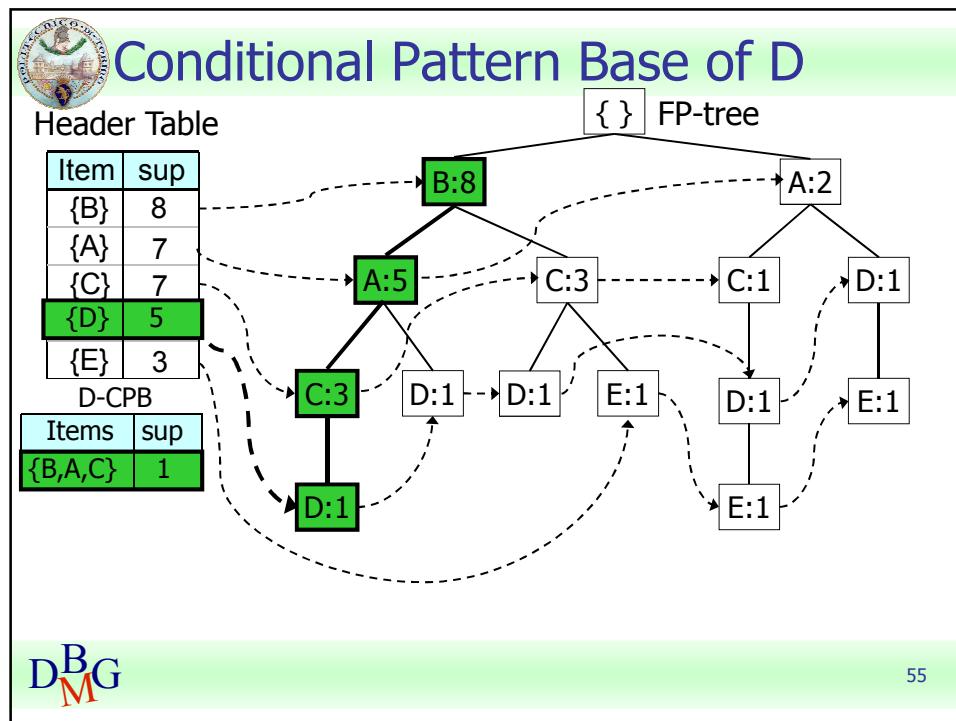

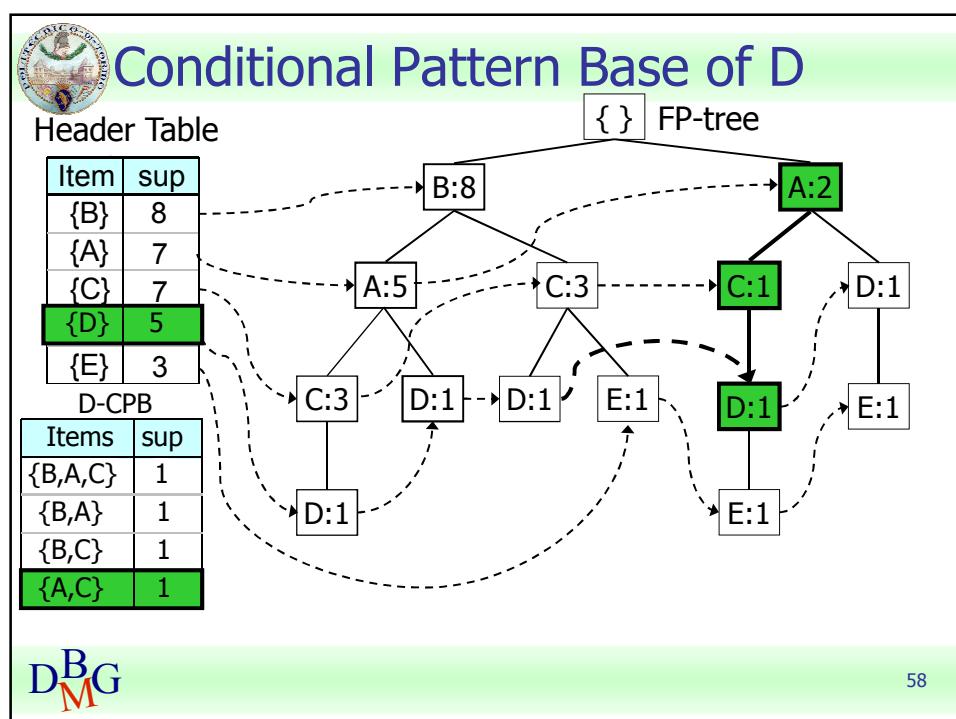
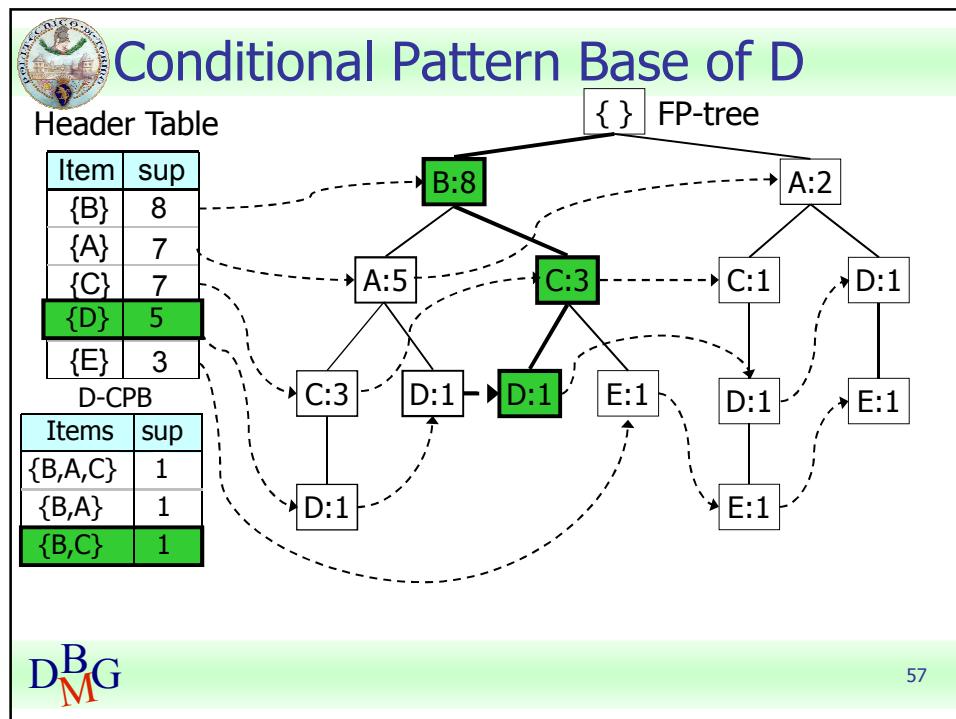



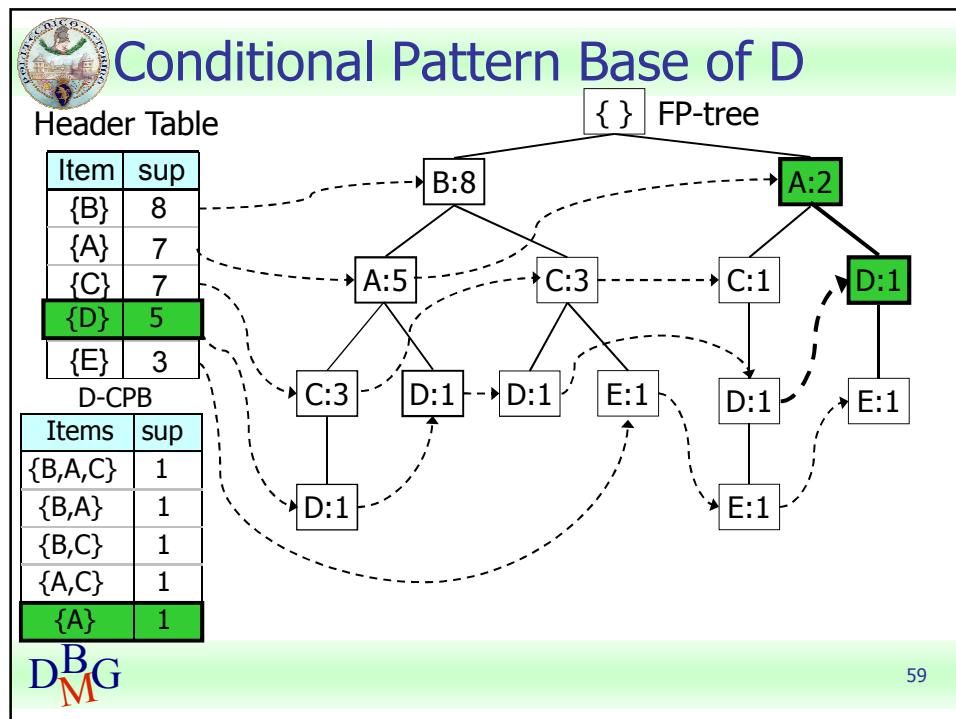




59

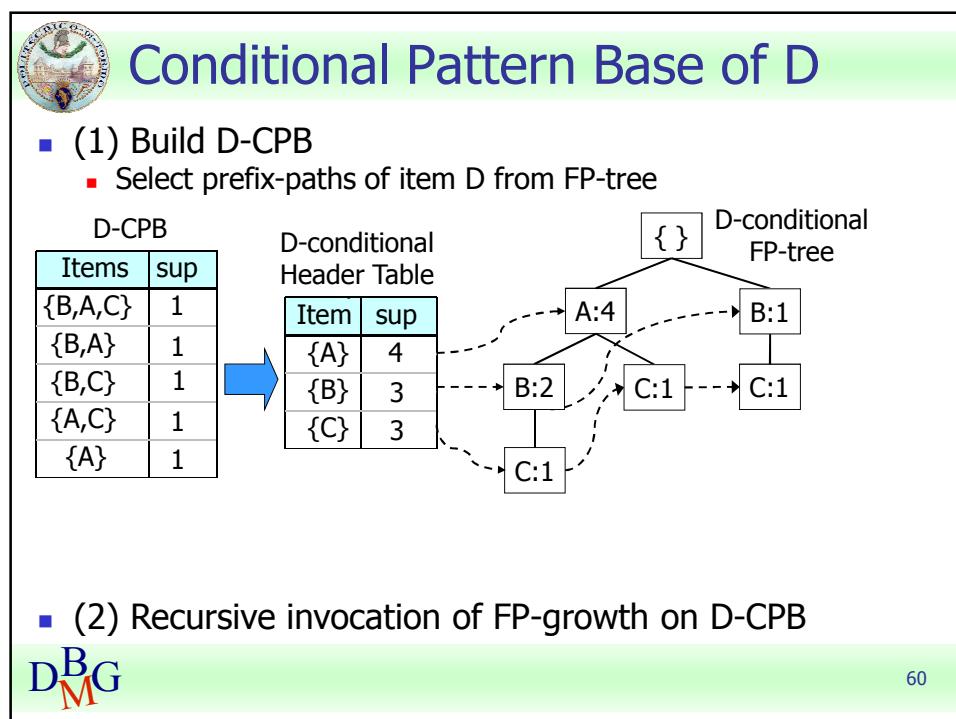

60

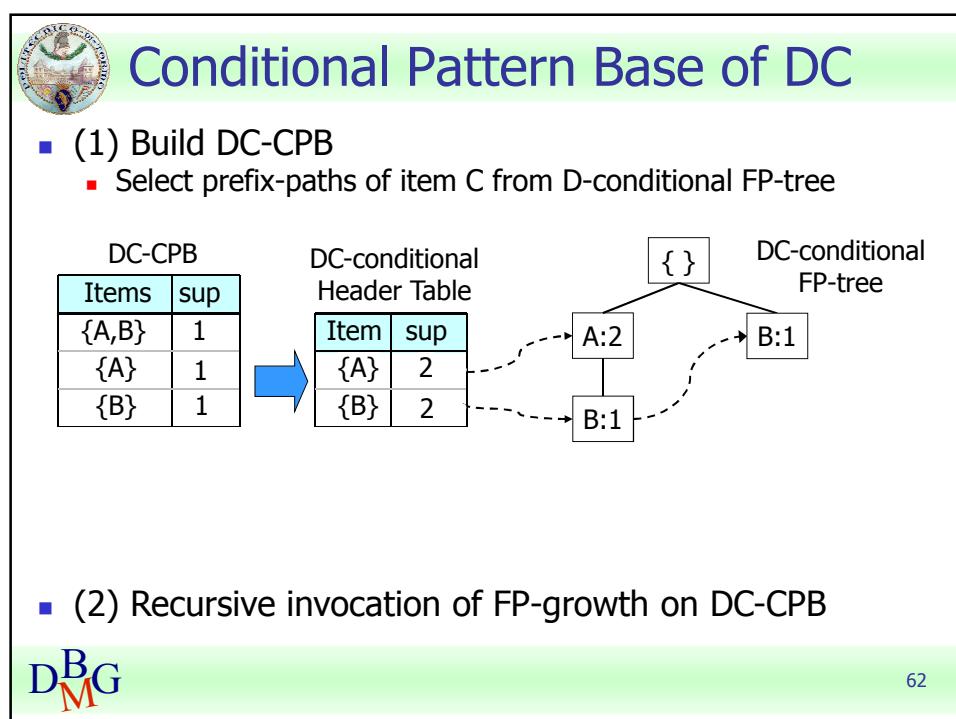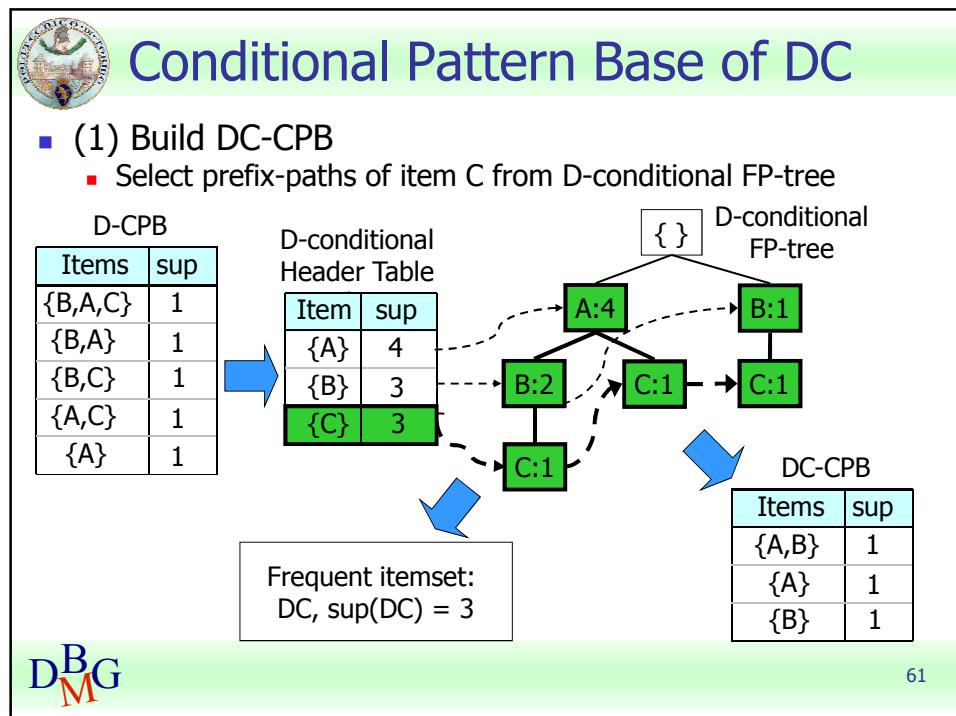

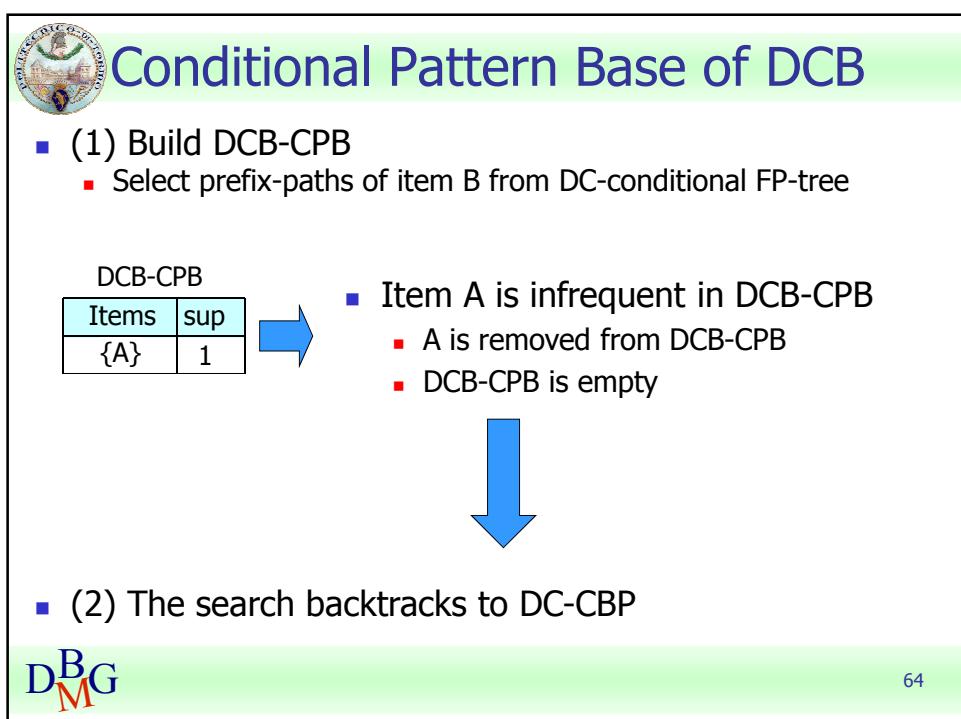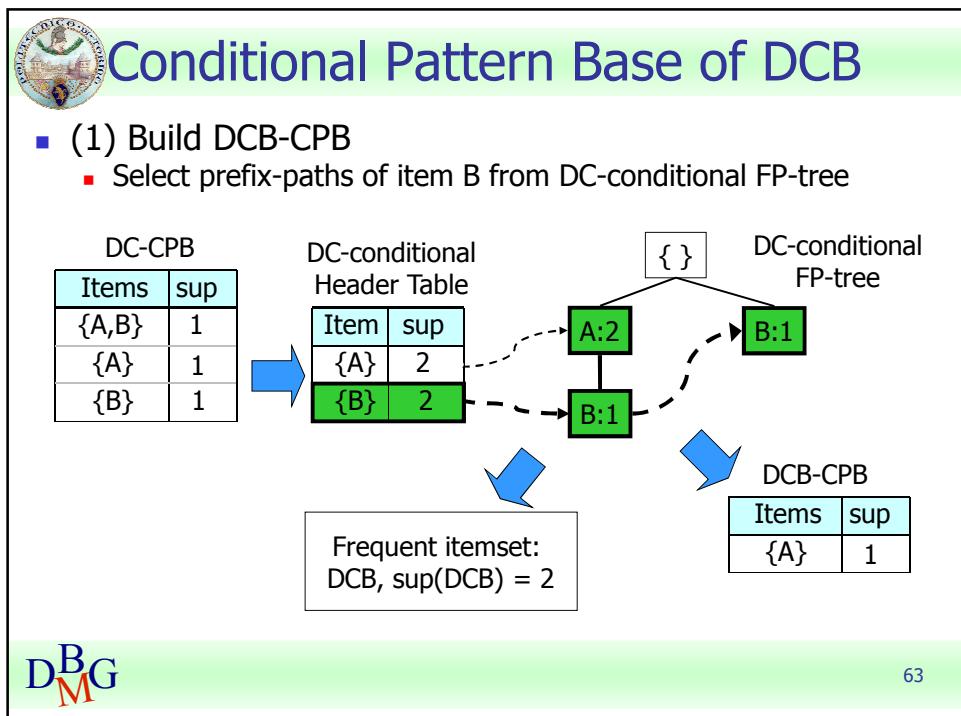


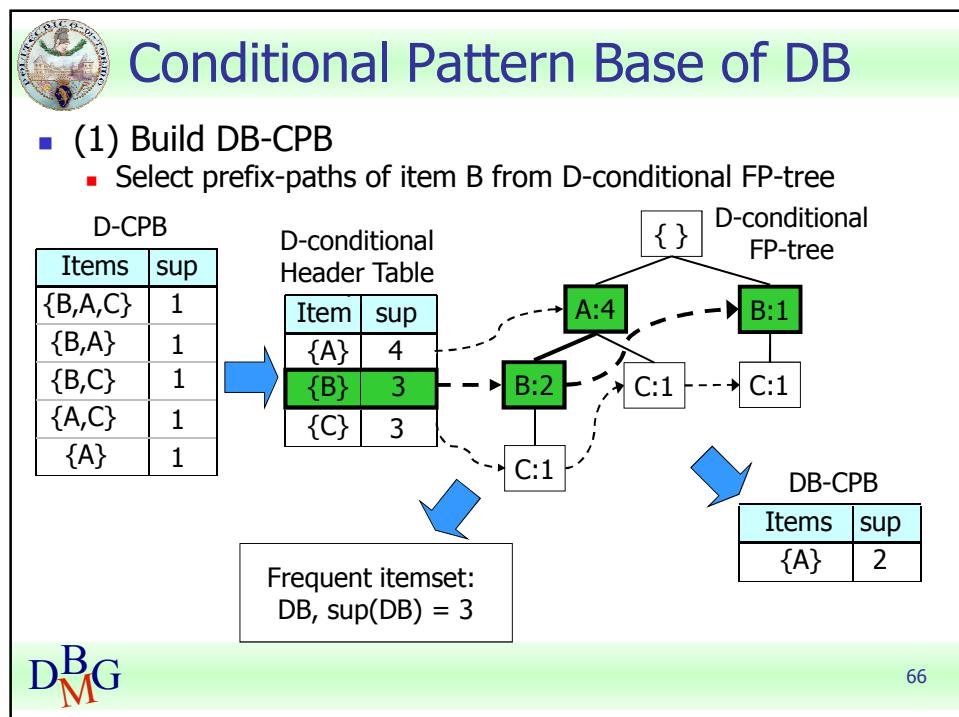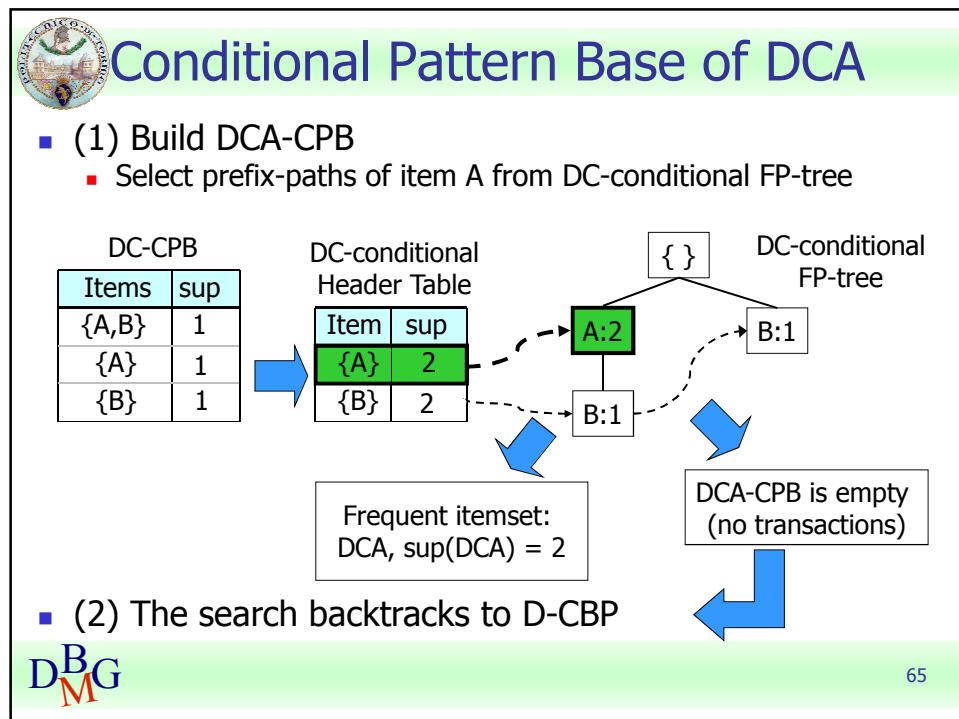



Conditional Pattern Base of DB

- (1) Build DB-CPB
 - Select prefix-paths of item B from D-conditional FP-tree

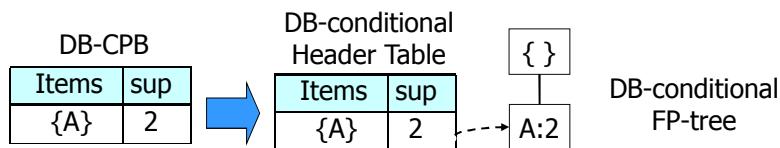

- (2) Recursive invocation of FP-growth on DB-CPB


D_M^BG

67



Conditional Pattern Base of DBA



- (1) Build DBA-CPB
 - Select prefix-paths of item A from DB-conditional FP-tree

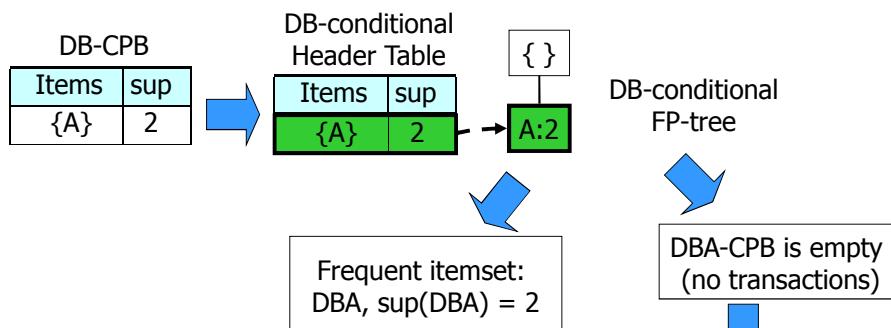

- (2) The search backtracks to D-CPB

D_M^BG

68

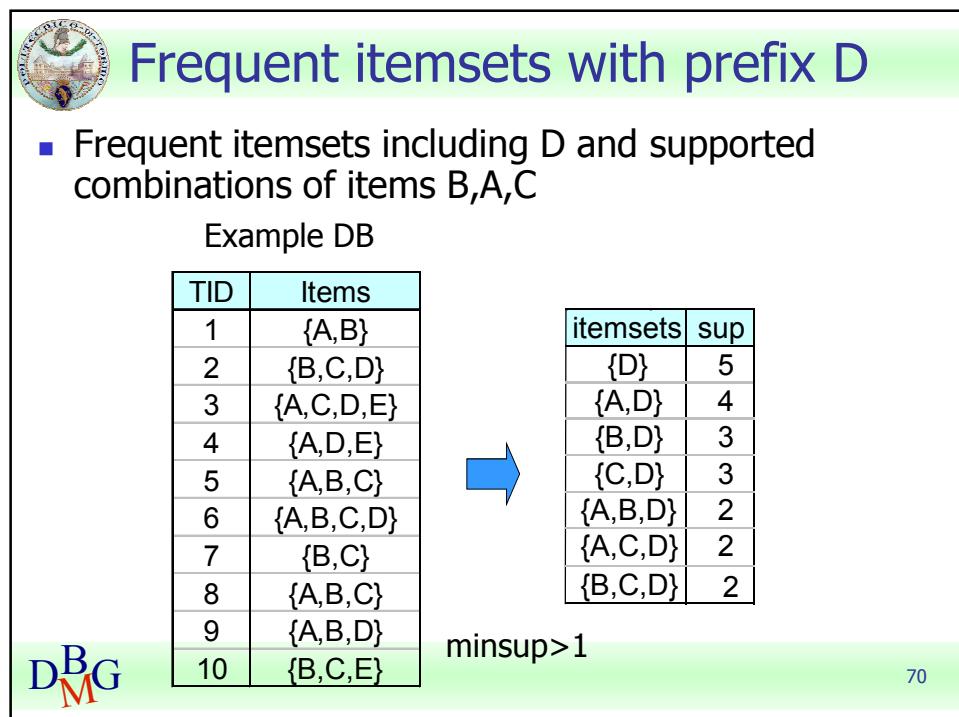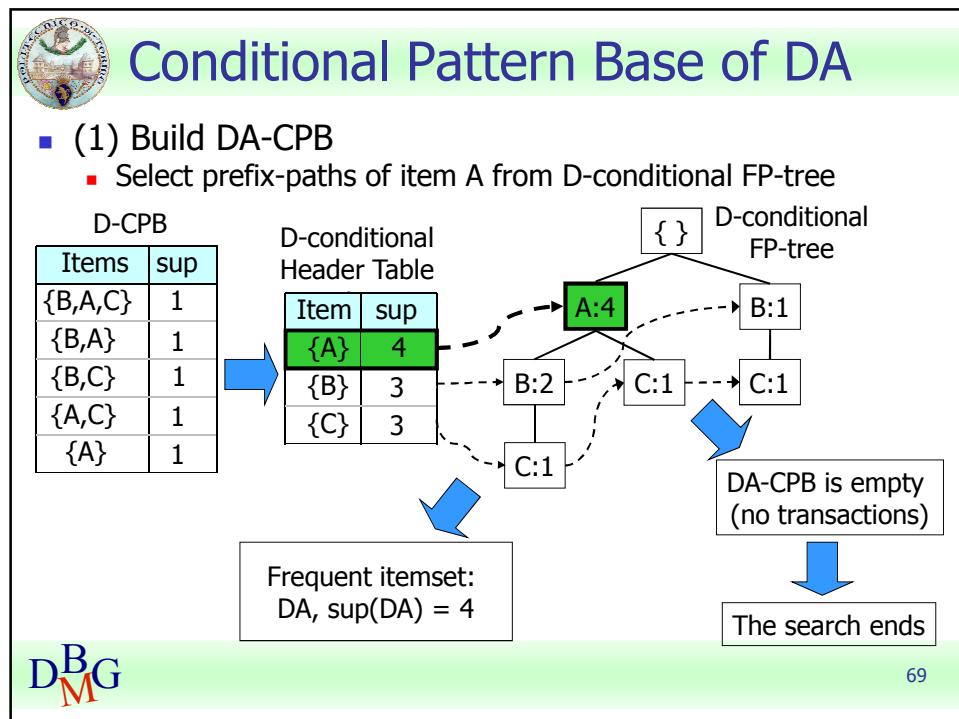



Other approaches

- Many other approaches to frequent itemset extraction
 - some covered later
- May exploit a different database representation
 - represent the tidset of each item [Zak00]

Horizontal Data Layout

TID	Items
1	A,B,E
2	B,C,D
3	C,E
4	A,C,D
5	A,B,C,D
6	A,E
7	A,B
8	A,B,C
9	A,C,D
10	B

Vertical Data Layout

A	B	C	D	E
1	1	2	2	1
4	2	3	4	3
5	5	4	5	6
6	7	8	9	
7	8	9		
8	10			
9				

From: Tan, Steinbach, Kumar, Introduction to Data Mining, McGraw Hill 2006

DB
M

71

Compact Representations

- Some itemsets are redundant because they have identical support as their supersets

TID	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
2	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
3	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
6	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
7	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
8	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
9	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
10	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	
12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	
13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	
14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	
15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	


■ Number of frequent itemsets = $3 \times \sum_{k=1}^{10} \binom{10}{k}$

- A compact representation is needed

DB
M

From: Tan, Steinbach, Kumar, Introduction to Data Mining, McGraw Hill 2006

72

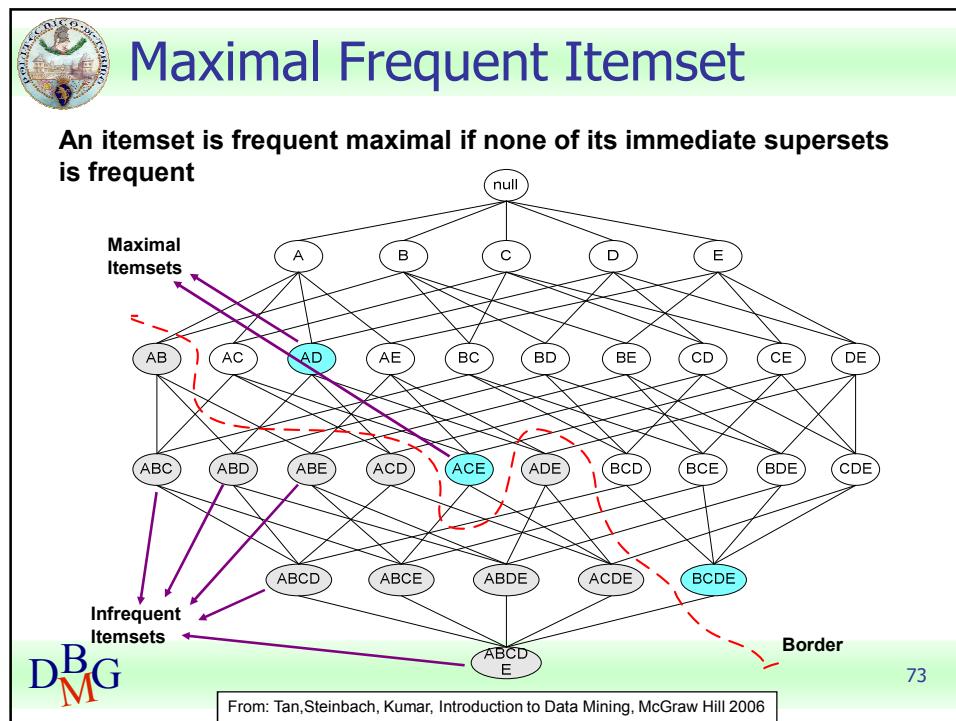

Closed Itemset

- An itemset is closed if none of its immediate supersets has the same support as the itemset



TID	Items
1	{A,B}
2	{B,C,D}
3	{A,B,C,D}
4	{A,B,D}
5	{A,B,C,D}

itemset	sup
{A}	4
{B}	5
{C}	3
{D}	4
{A,B}	4
{A,C}	2
{A,D}	3
{B,C}	3
{B,D}	4
{C,D}	3

itemset	sup
{A,B,C}	2
{A,B,D}	3
{A,C,D}	2
{B,C,D}	3
{A,B,C,D}	2


From: Tan, Steinbach, Kumar, Introduction to Data Mining, McGraw Hill 2006

74

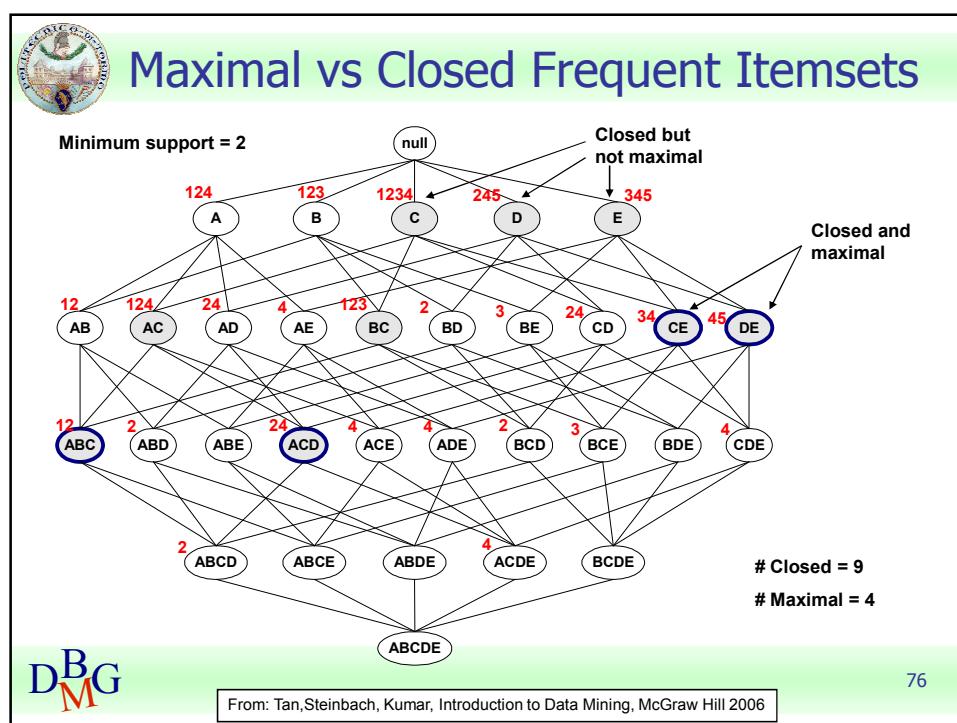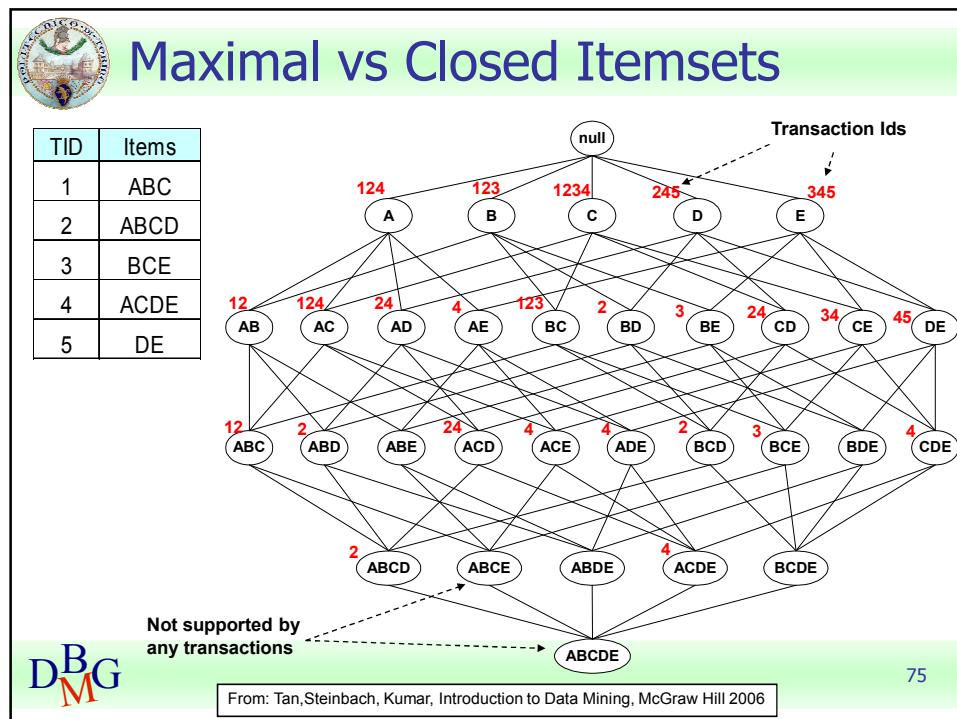



Maximal vs Closed Itemsets

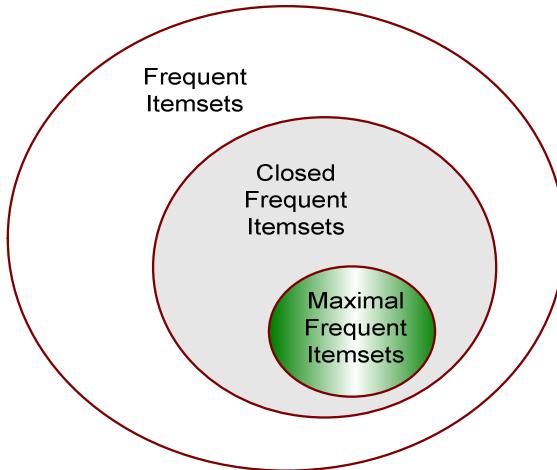

From: Tan, Steinbach, Kumar, Introduction to Data Mining, McGraw Hill 2006

DB
M

77



Effect of Support Threshold

- Selection of the appropriate *minsup* threshold is not obvious
 - If *minsup* is too high
 - itemsets including rare but interesting items may be lost
 - example: pieces of jewellery (or other expensive products)
 - If *minsup* is too low
 - it may become computationally *very expensive*
 - the number of frequent itemsets becomes *very large*

DB
M

78



Interestingness Measures

- A large number of patterns may be extracted
 - rank patterns by their interestingness
- Objective measures
 - rank patterns based on statistics computed from data
 - initial framework [Agr94] only considered support and confidence
 - other statistical measures available
- Subjective measures
 - rank patterns according to user interpretation [Silb98]
 - interesting if it contradicts the expectation of a user
 - interesting if it is actionable

DB
MG

79



Confidence measure: always reliable?

- 5000 high school students are given
 - 3750 eat cereals
 - 3000 play basket
 - 2000 eat cereals and play basket
- Rule

$$\text{play basket} \Rightarrow \text{eat cereals}$$

sup = 40%, conf = 66,7%

is misleading because eat cereals has sup 75% ($>66,7\%$)
- Problem caused by high frequency of rule head
 - negative correlation

	basket	not basket	total
cereals	2000	1750	3750
not cereals	1000	250	1250
total	3000	2000	5000

DB
MG

80



Correlation or lift

$r: A \Rightarrow B$

$$\text{Correlation} = \frac{P(A, B)}{P(A)P(B)} = \frac{\text{conf}(r)}{\text{sup}(B)}$$

- Statistical independence
 - Correlation = 1
- Positive correlation
 - Correlation > 1
- Negative correlation
 - Correlation < 1

DB
M

81



Example

- Association rule

play basket \Rightarrow eat cereals

has corr = 0.89

 - negative correlation
- but rule

play basket \Rightarrow not (eat cereals)

has corr = 1,34

DB
M

82

DB
M

#	Measure	Formula
1	ϕ -coefficient	$\frac{P(A,B) - P(A)P(B)}{\sqrt{P(A)(1-P(A))(1-P(B))}}$
2	Goodman-Kruskal's (λ)	$\frac{\sum_{j=1}^k \max_j P(A_j, B_k) + \sum_{k=1}^l \max_j P(A_j, B_k) - \max_j P(A_j) - \max_k P(B_k)}{d - \max_j P(A_j) - \max_k P(B_k)}$
3	Odds ratio (α)	$\frac{P(A,B)P(\bar{A},\bar{B})}{P(\bar{A},B)P(A,\bar{B})}$
4	Yule's Q	$\frac{P(A,B)P(\bar{A},\bar{B}) - P(A,\bar{B})P(\bar{A},B)}{P(A,B)P(\bar{A},\bar{B}) + P(A,\bar{B})P(\bar{A},B)} = \frac{\alpha-1}{\alpha+1}$
5	Yule's Y	$\frac{\sqrt{P(A,B)P(\bar{A},\bar{B})} - \sqrt{P(A,B)P(\bar{A},B)}}{\sqrt{P(A,B)P(\bar{A},\bar{B})} + \sqrt{P(A,B)P(\bar{A},B)}} = \frac{\sqrt{\alpha}-1}{\sqrt{\alpha}+1}$
6	Kappa (κ)	$\frac{P(A,B) + P(\bar{A},\bar{B}) - P(A)P(B) - P(\bar{A})P(\bar{B})}{1 - P(A)P(B) - P(\bar{A})P(\bar{B})}$
7	Mutual Information (M)	$\frac{\sum_i \sum_j P(A_i, B_j) \log \frac{P(A_i, B_j)}{P(A_i)P(B_j)}}{\min(-\sum_i P(A_i) \log P(A_i), -\sum_j P(B_j) \log P(B_j))}$
8	J-Measure (J)	$\max \left(P(A,B) \log \left(\frac{P(B A)}{P(\bar{B} A)} \right) + P(\bar{A}B) \log \left(\frac{P(\bar{B} A)}{P(\bar{B})} \right), P(A,B) \log \left(\frac{P(\bar{A} B)}{P(\bar{A})} \right) + P(\bar{A}\bar{B}) \log \left(\frac{P(\bar{A} B)}{P(\bar{B})} \right) \right)$
9	Gini index (G)	$\max \left(P(A)[P(B A)^2 + P(\bar{B} A)^2] + P(\bar{A})[P(B \bar{A})^2 + P(\bar{B} \bar{A})^2] - P(B)^2 - P(\bar{B})^2, P(B)[P(A B)^2 + P(\bar{A} B)^2] + P(\bar{B})[P(A \bar{B})^2 + P(\bar{A} \bar{B})^2] - P(A)^2 - P(\bar{A})^2 \right)$
10	Support (s)	$P(A,B)$
11	Confidence (c)	$\max(P(B A), P(\bar{A} B))$
12	Laplace (L)	$\max \left(\frac{NP(A,B)+1}{NP(A)+2}, \frac{NP(A,B)+1}{NP(B)+2} \right)$
13	Conviction (V)	$\max \left(\frac{P(A)P(\bar{B})}{P(A\bar{B})}, \frac{P(\bar{B})P(\bar{A})}{P(\bar{B}\bar{A})} \right)$
14	Interest (I)	$\frac{P(A)P(\bar{B})}{\sqrt{P(A)P(B)}}$
15	cosine (IS)	$\frac{P(A,B) - P(A)P(B)}{\sqrt{P(A)(1-P(A))P(B)(1-P(B))}}$
16	Piatetsky-Shapiro's (PS)	$P(A,B) - P(A)P(B)$
17	Certainty factor (F)	$\max \left(\frac{P(B A)-P(B)}{1-P(B)}, \frac{P(\bar{A} B)-P(\bar{A})}{1-P(\bar{A})} \right)$
18	Added Value (AV)	$\max(P(B A) - P(B), P(\bar{A} B) - P(\bar{A}))$
19	Collective strength (S)	$\frac{P(A,B)+P(\bar{A}\bar{B})}{P(A)P(\bar{B})+P(\bar{A})P(B)} \times \frac{1-P(A)P(B)-P(\bar{A})P(\bar{B})}{1-P(A,B)-P(\bar{A}\bar{B})}$
20	Jaccard (ζ)	$\frac{P(A)+P(\bar{B})-P(A,\bar{B})}{\sqrt{P(A,B)\max(P(B A)-P(B), P(\bar{A} B)-P(\bar{A}))}}$
21	Klosgen (K)	